

FIG. 1A
(Prior Art)

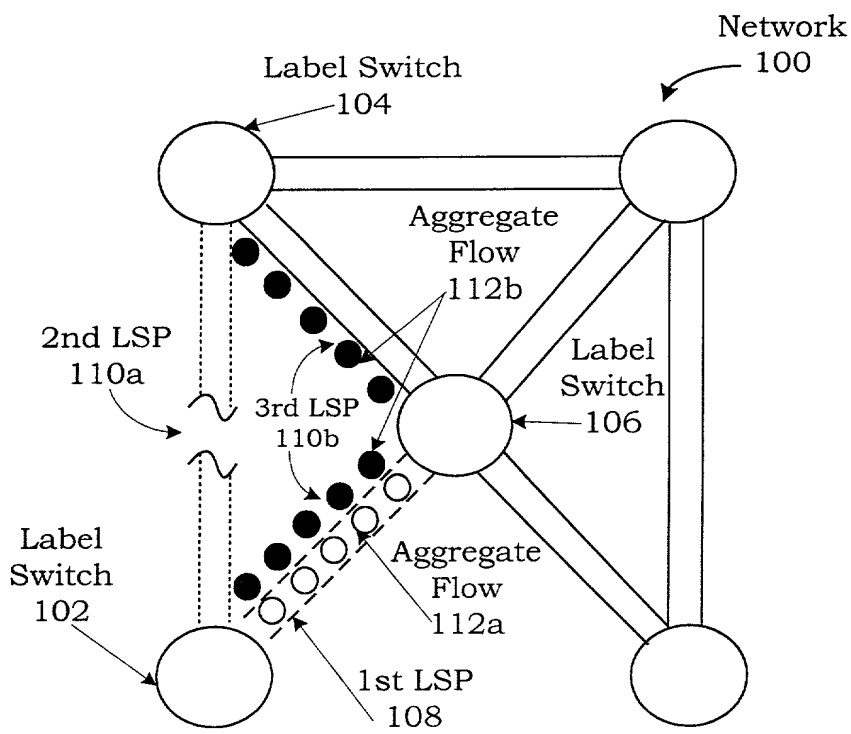


FIG. 1B
(Prior Art)

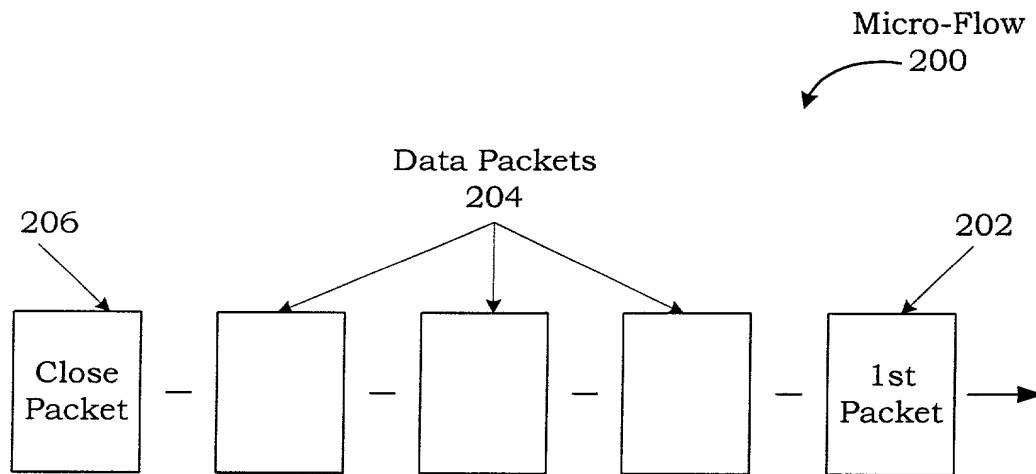


FIG. 2A

$Q_0 S$ 210

216	218	220
Packet Discard Time Limit (D)	Weighing Factor for Available Rate (W)	Guaranteed Rate (GR)
Micro-Flow Timeout Period (DT)	Available Rate (AR)	Delay Variation (Q)
222	224	226

The table defines parameters for the Micro-Flow 210. The top row shows parameters 216, 218, and 220. The bottom row shows parameters 222, 224, and 226. The middle rows provide the full names for these parameters: Packet Discard Time Limit (D), Weighing Factor for Available Rate (W), Guaranteed Rate (GR), Micro-Flow Timeout Period (DT), Available Rate (AR), and Delay Variation (Q).

FIG. 2C

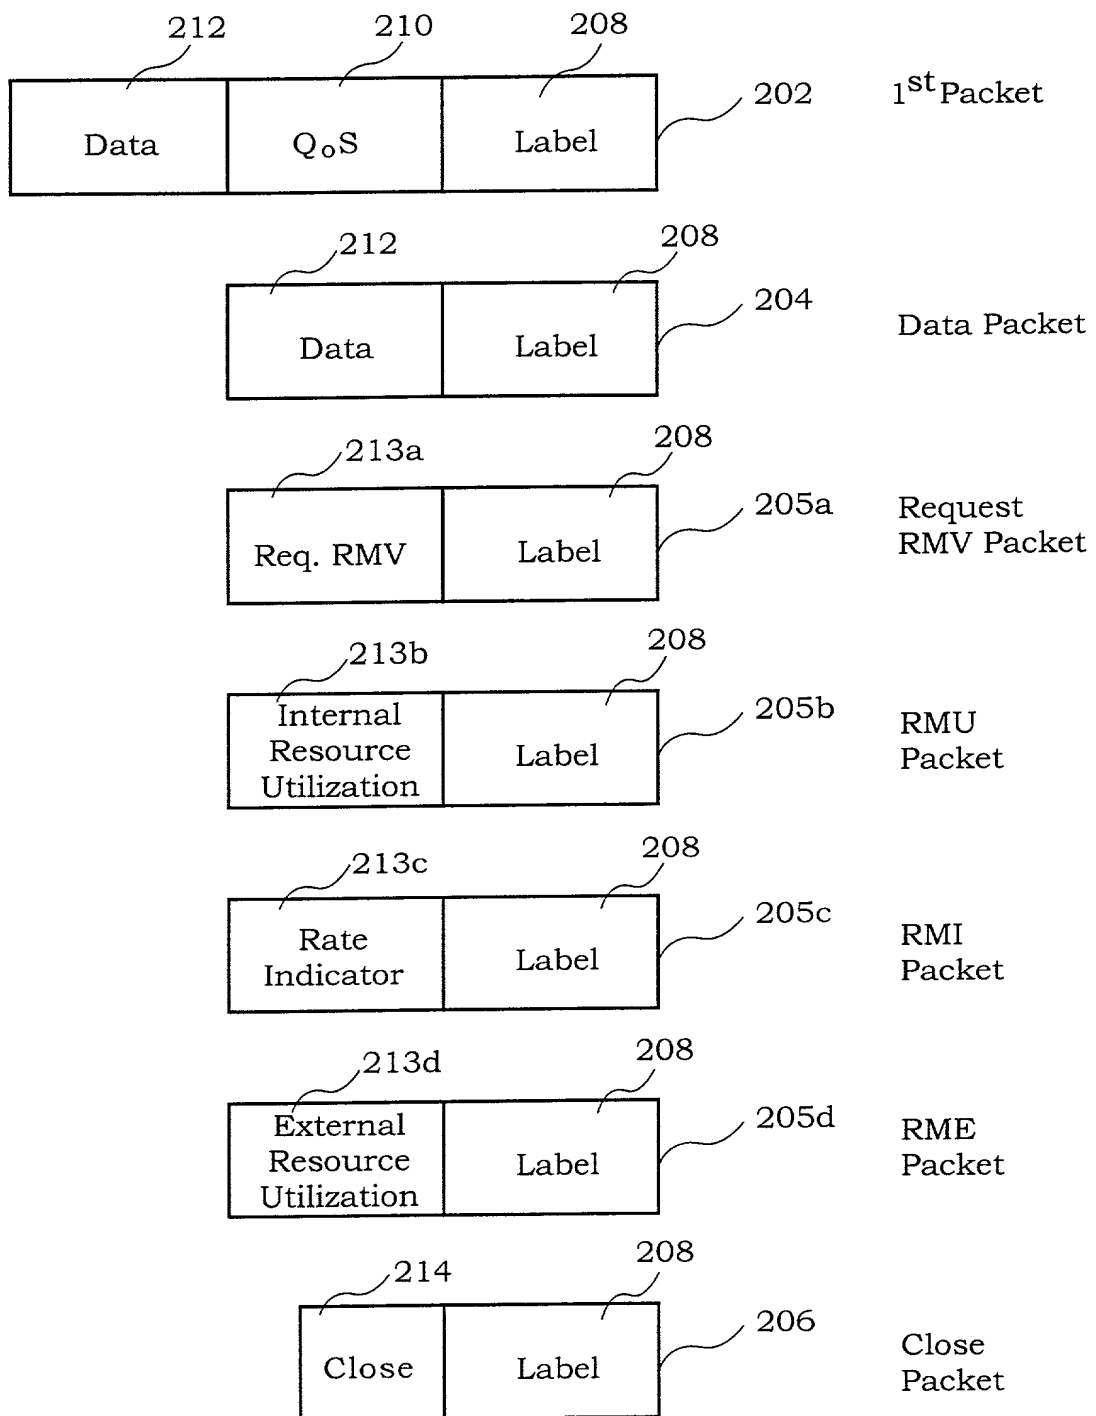


FIG. 2B

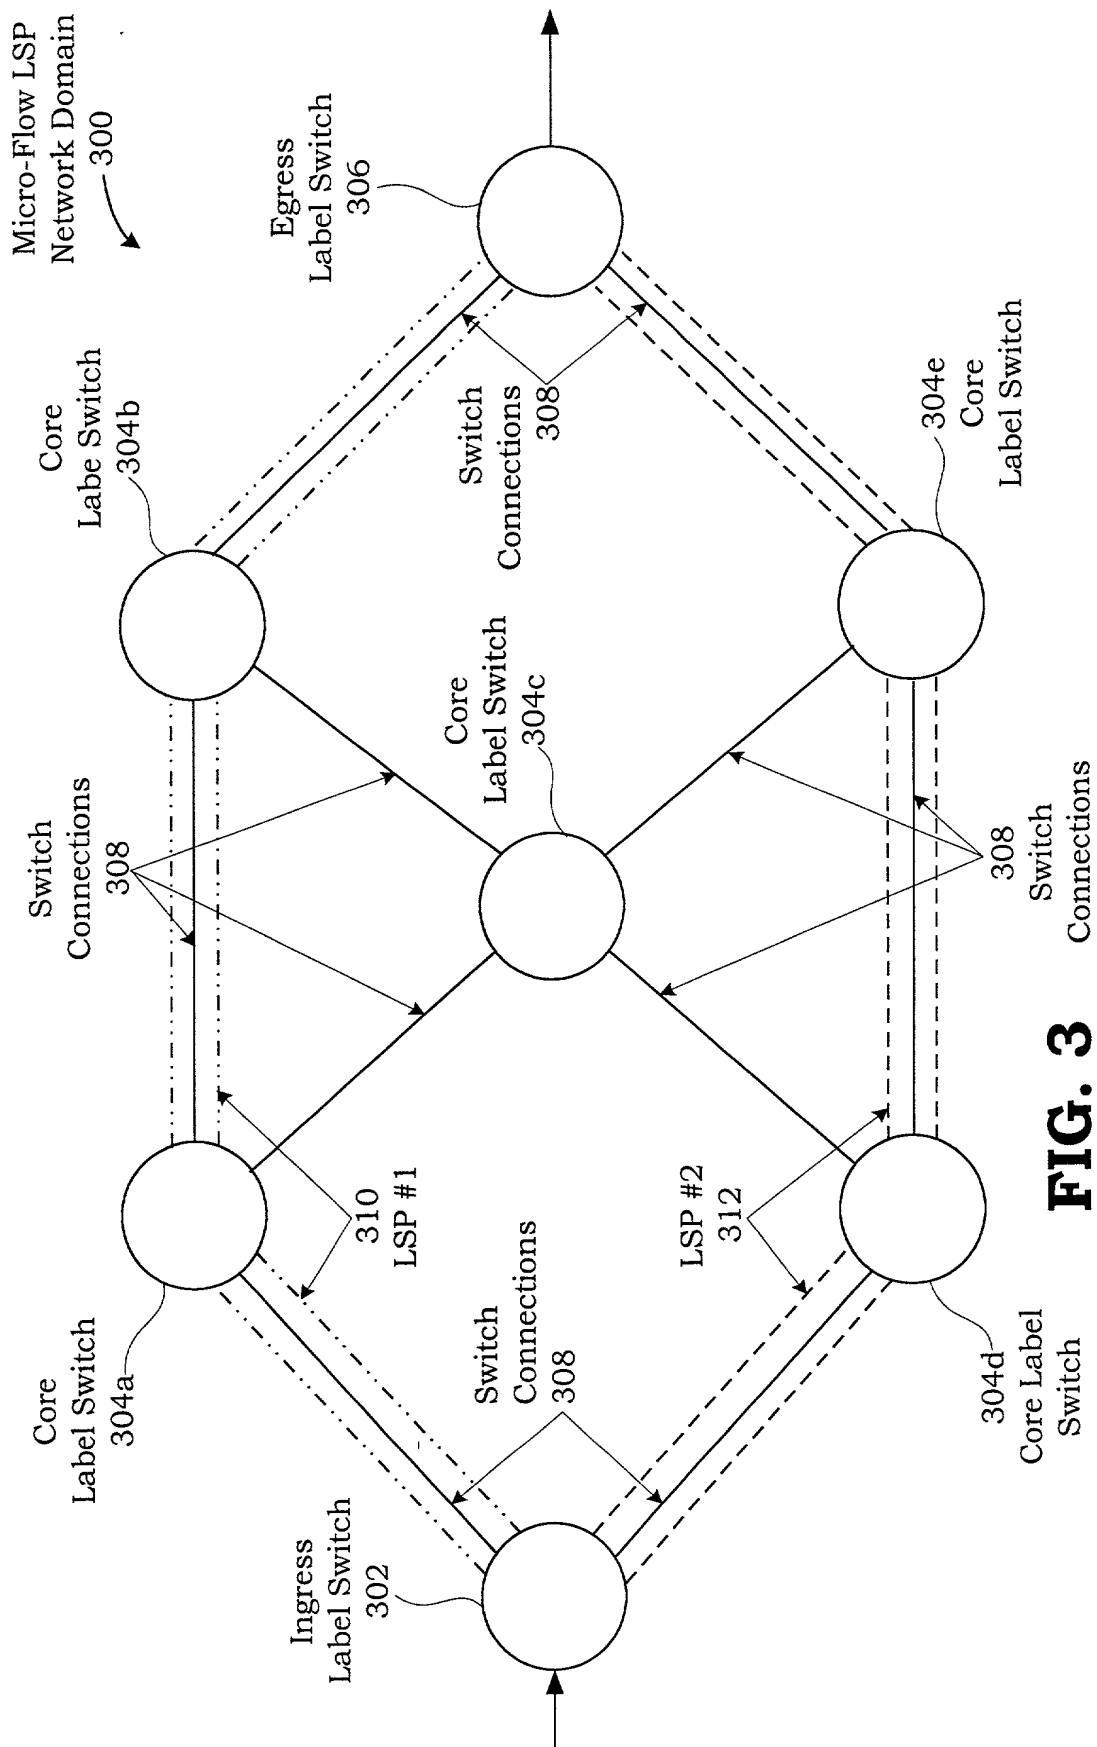


FIG. 3

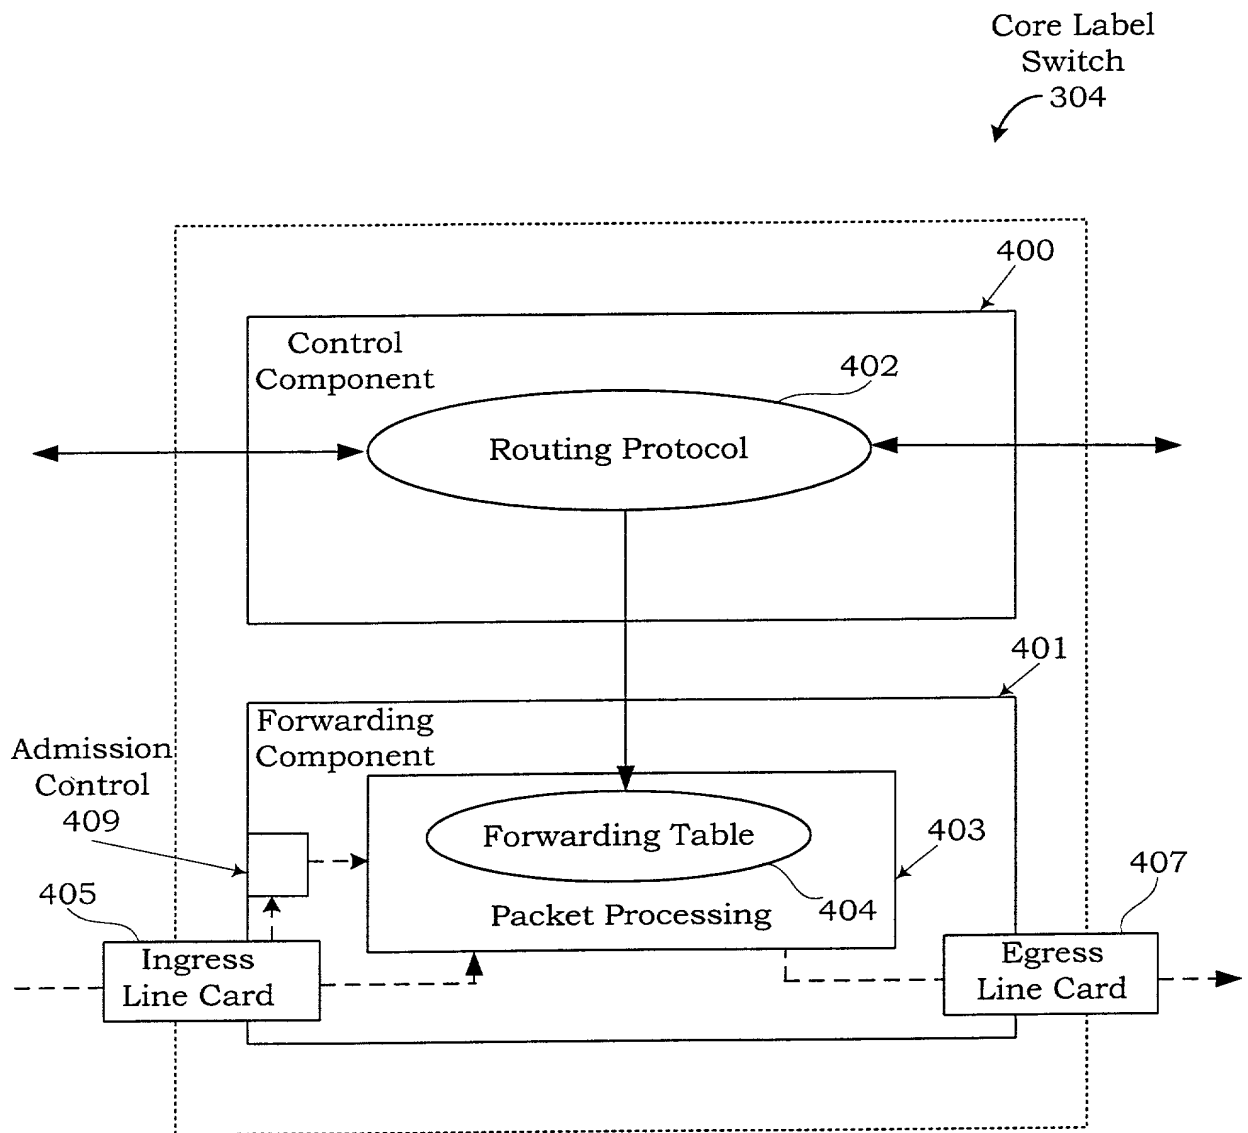


FIG. 4A

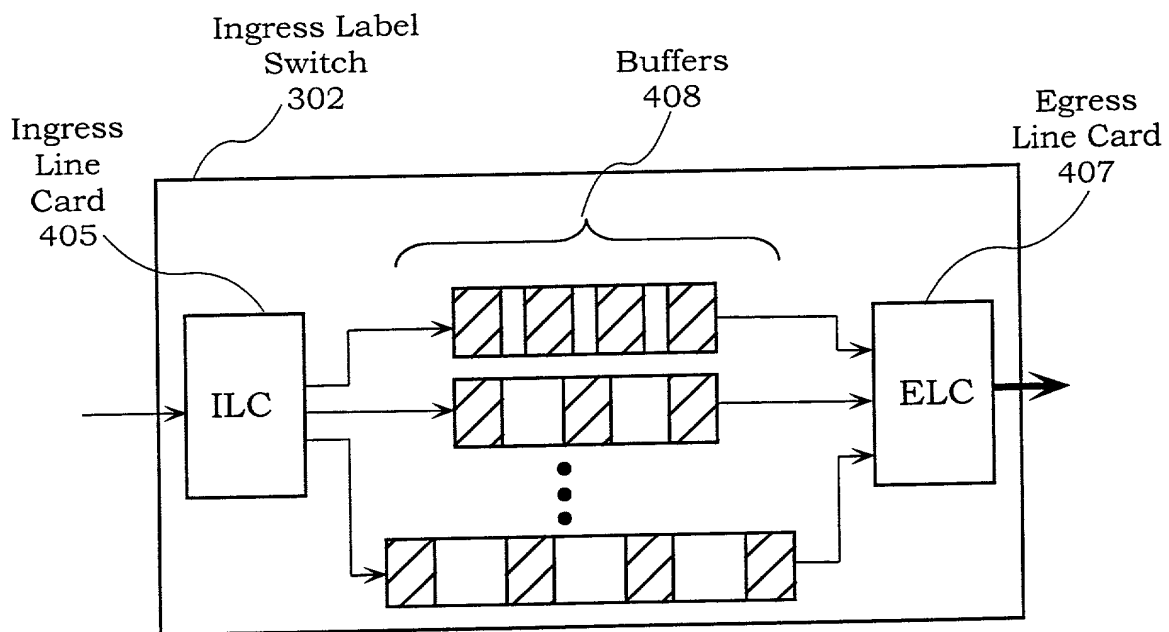
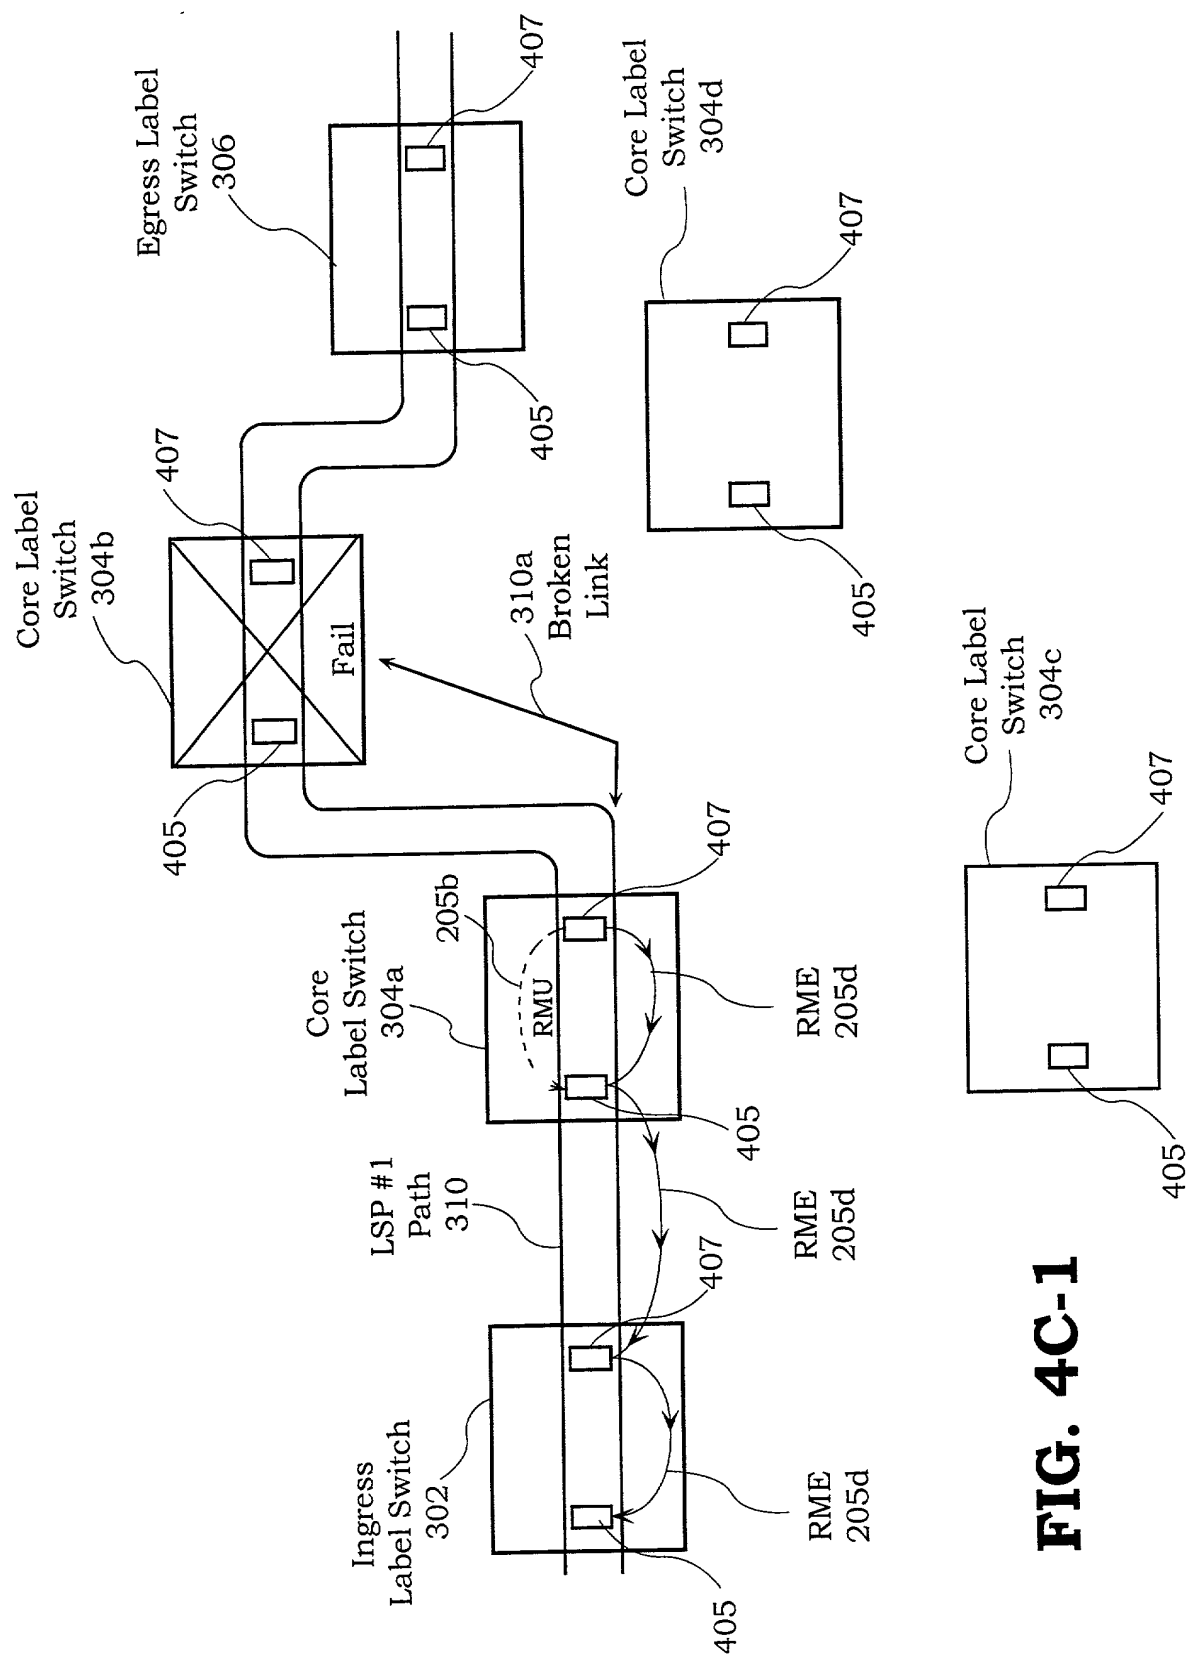


FIG. 4B



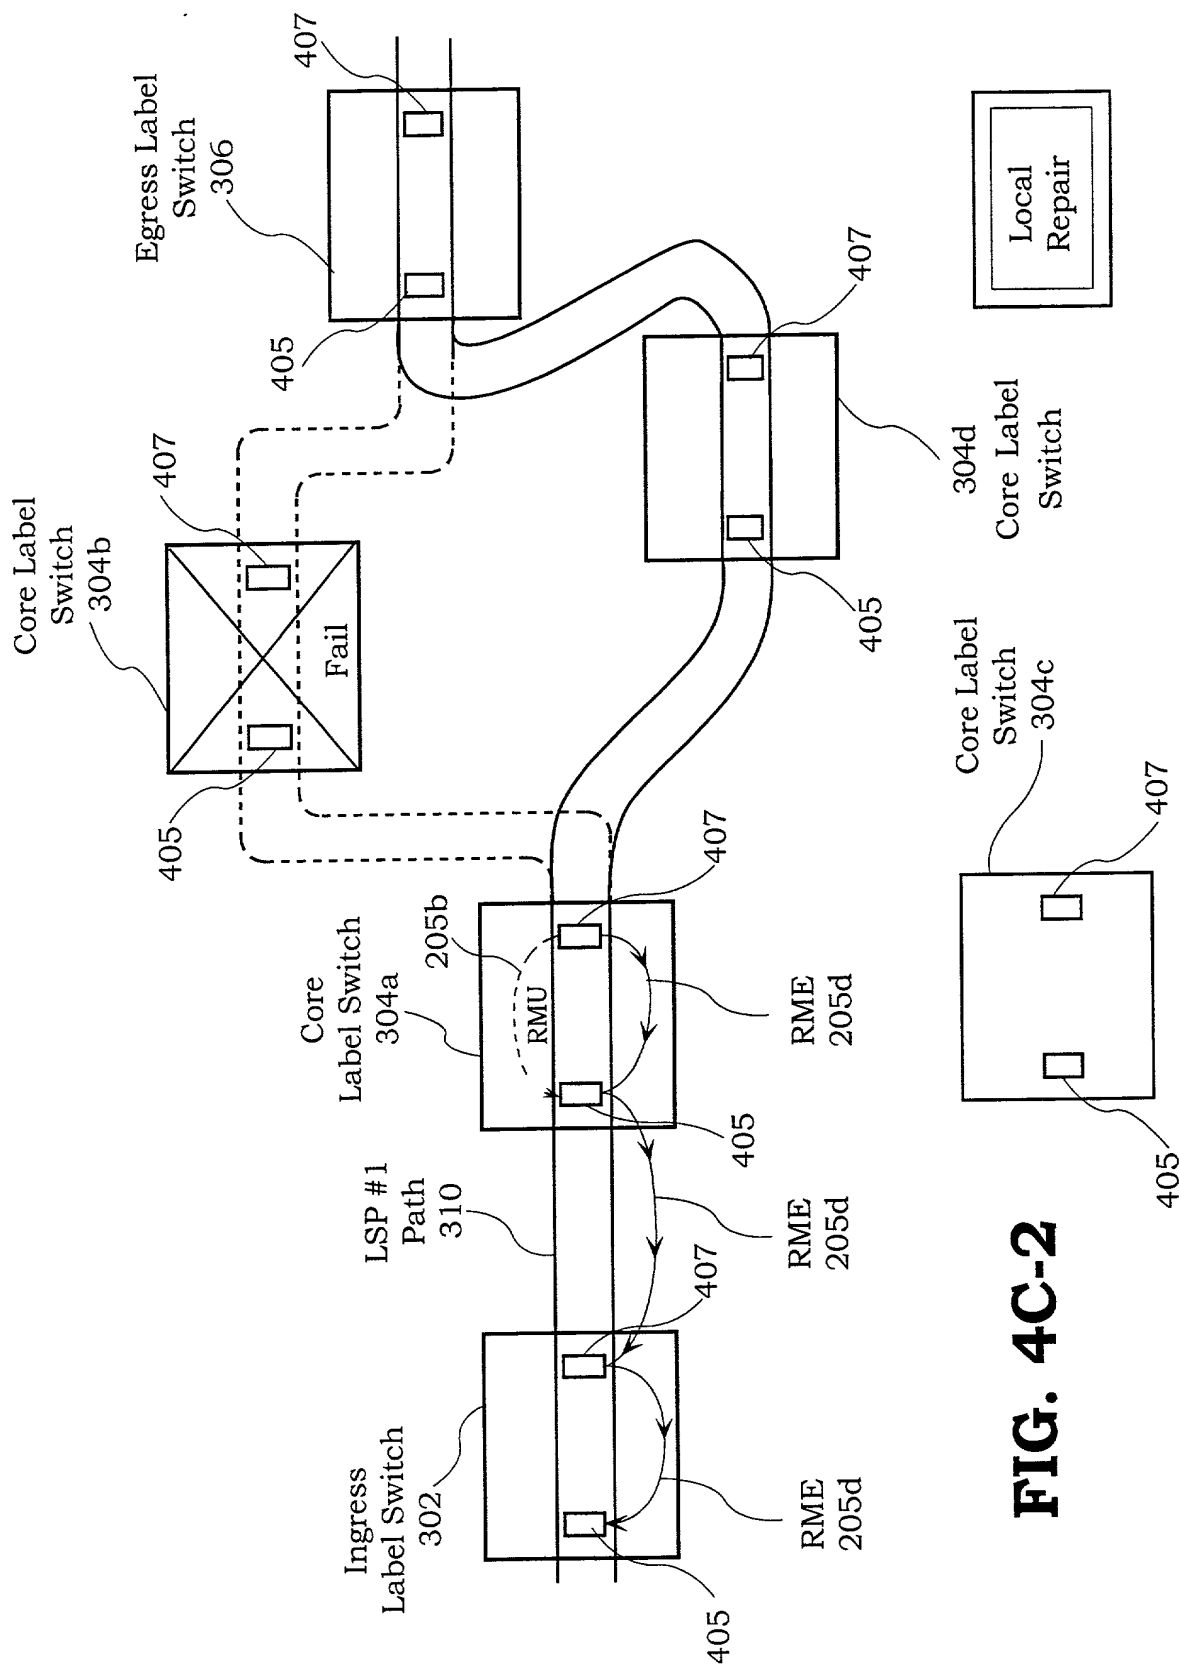


FIG. 4C-2

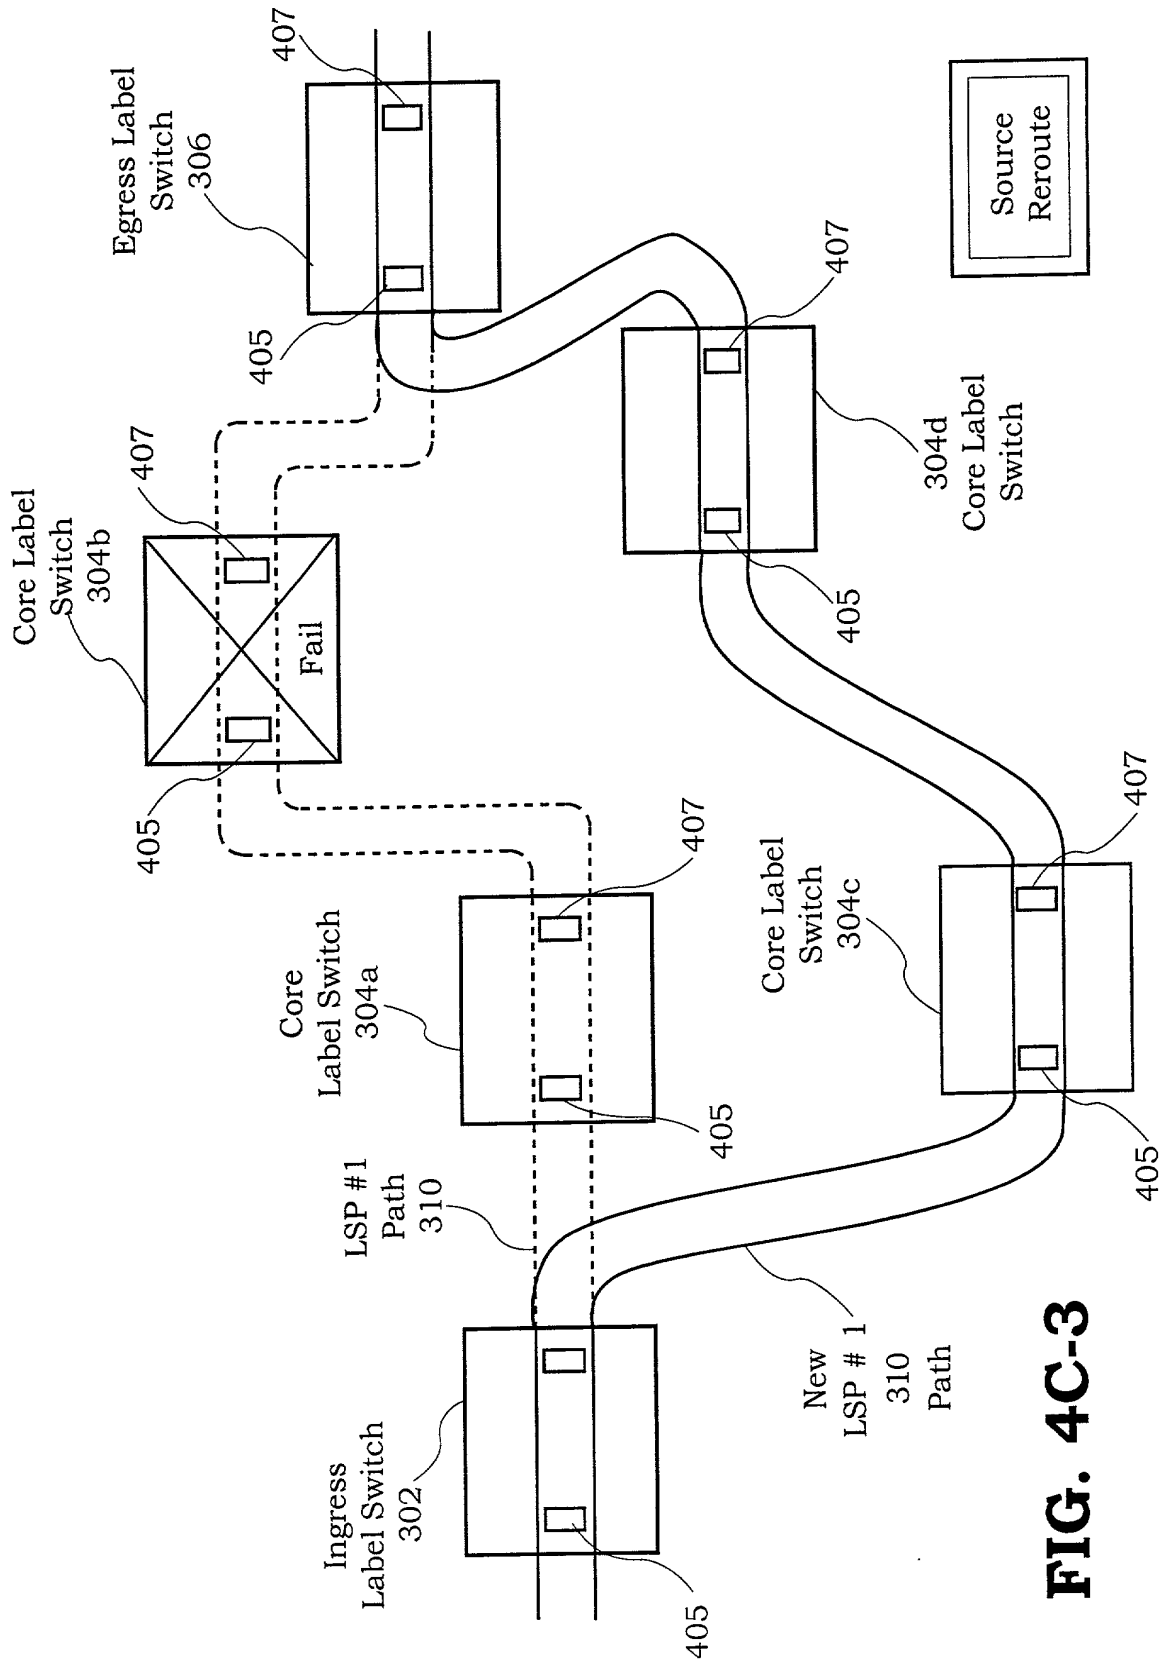


FIG. 4C-3

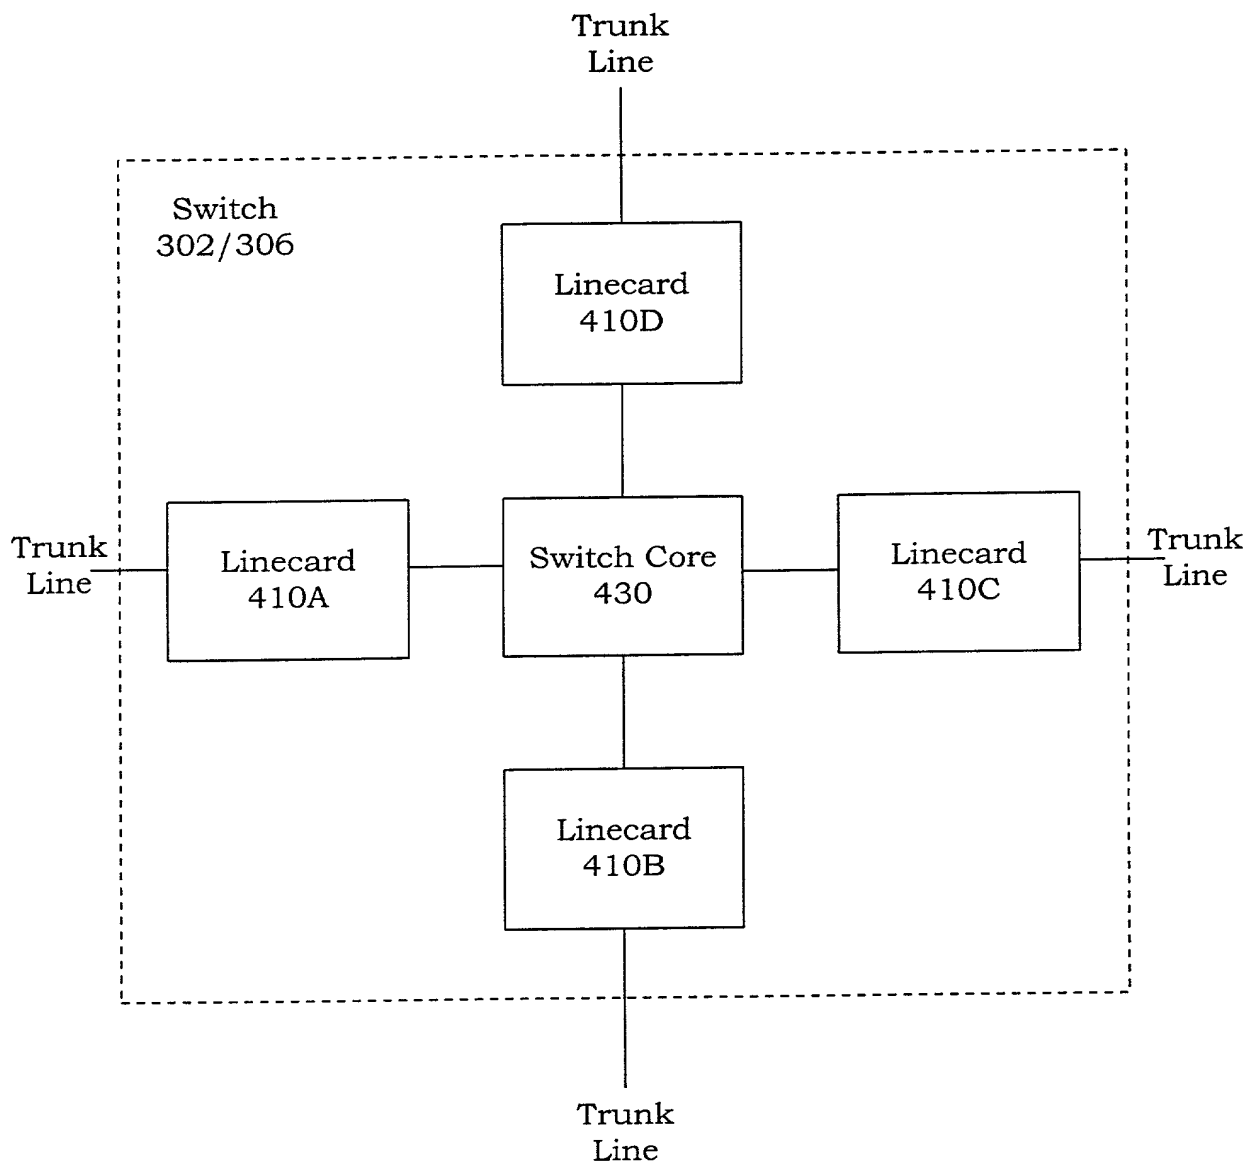


FIG. 4D

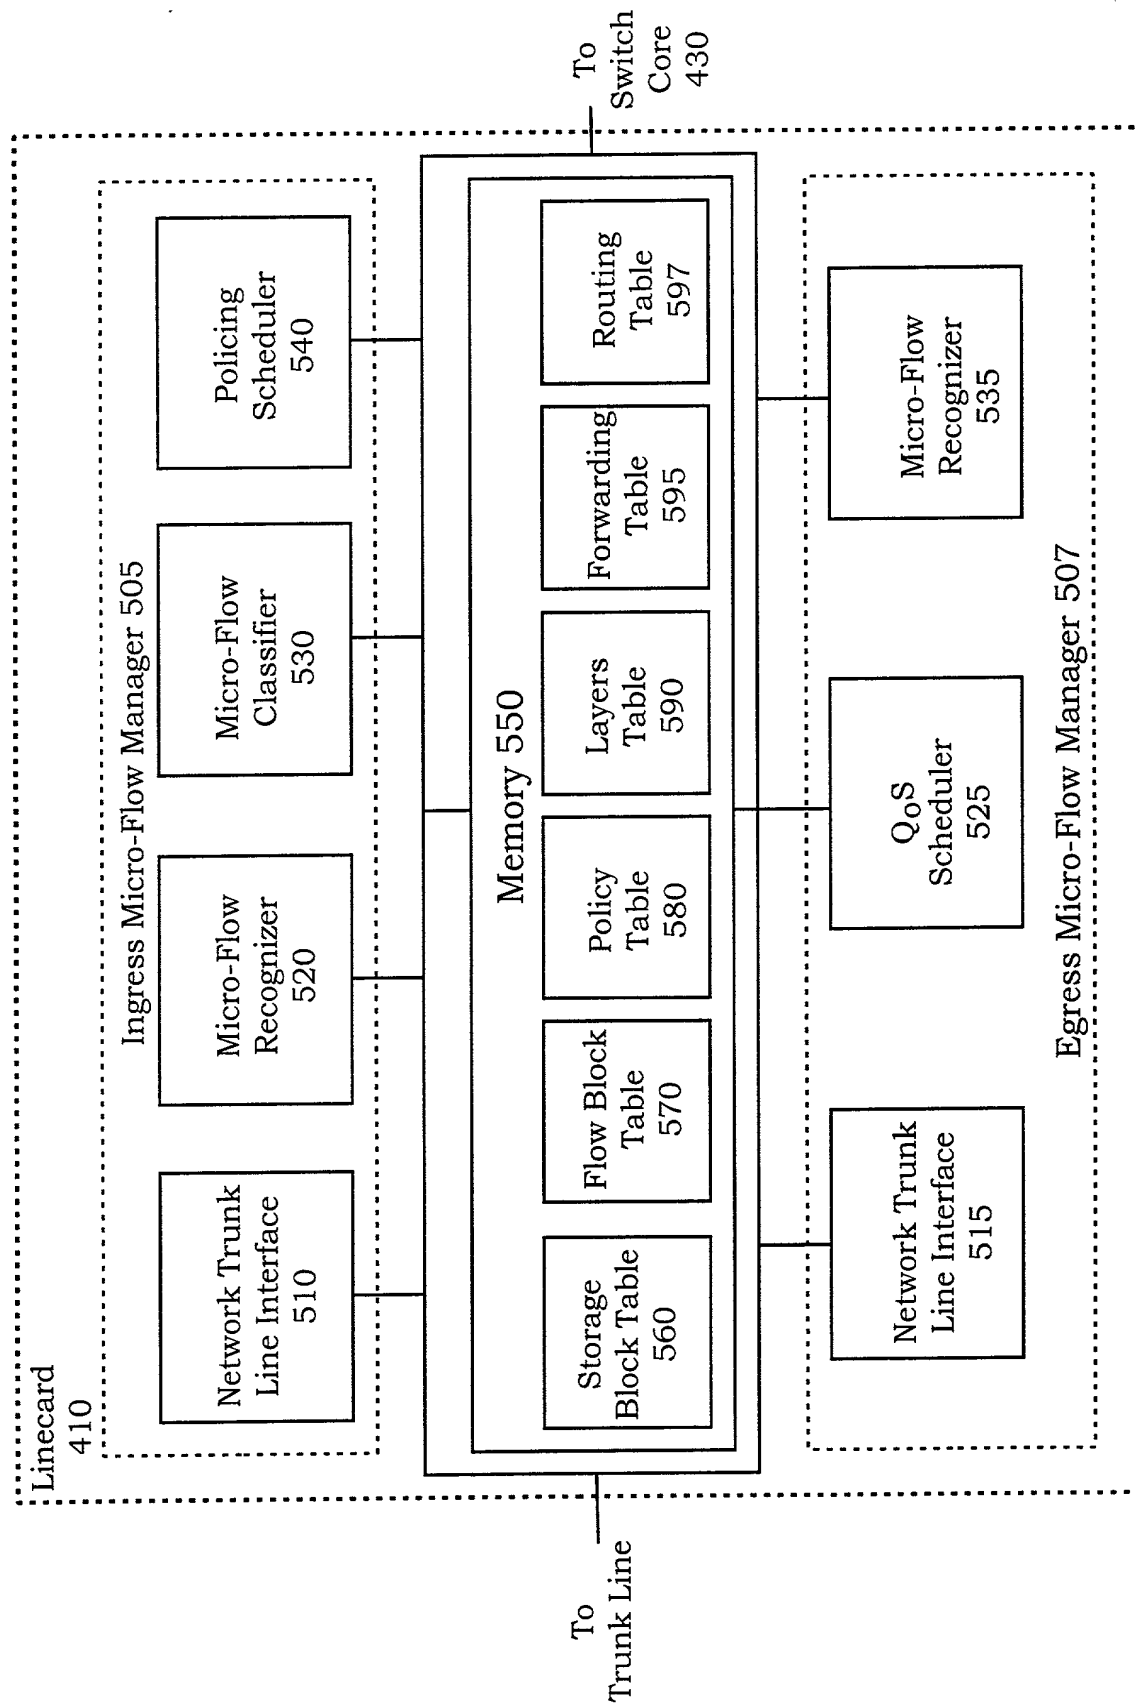


FIG. 5

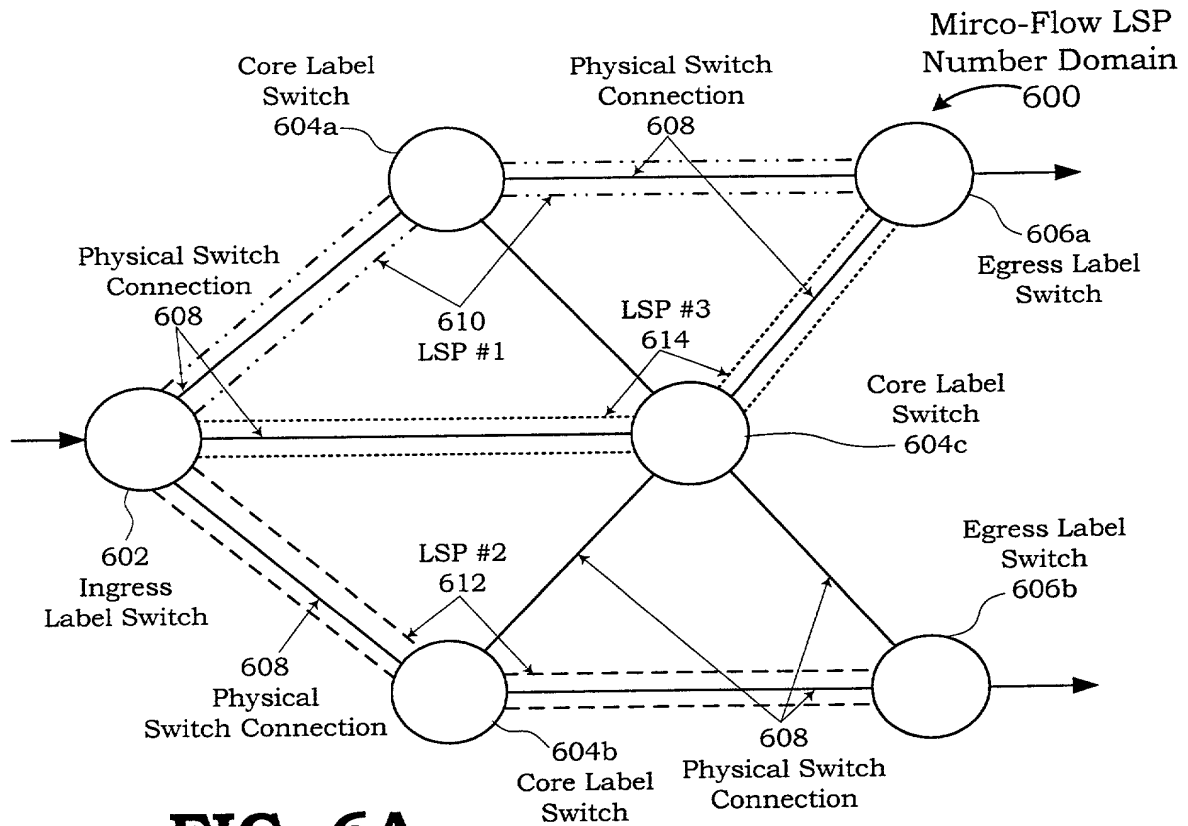


FIG. 6A

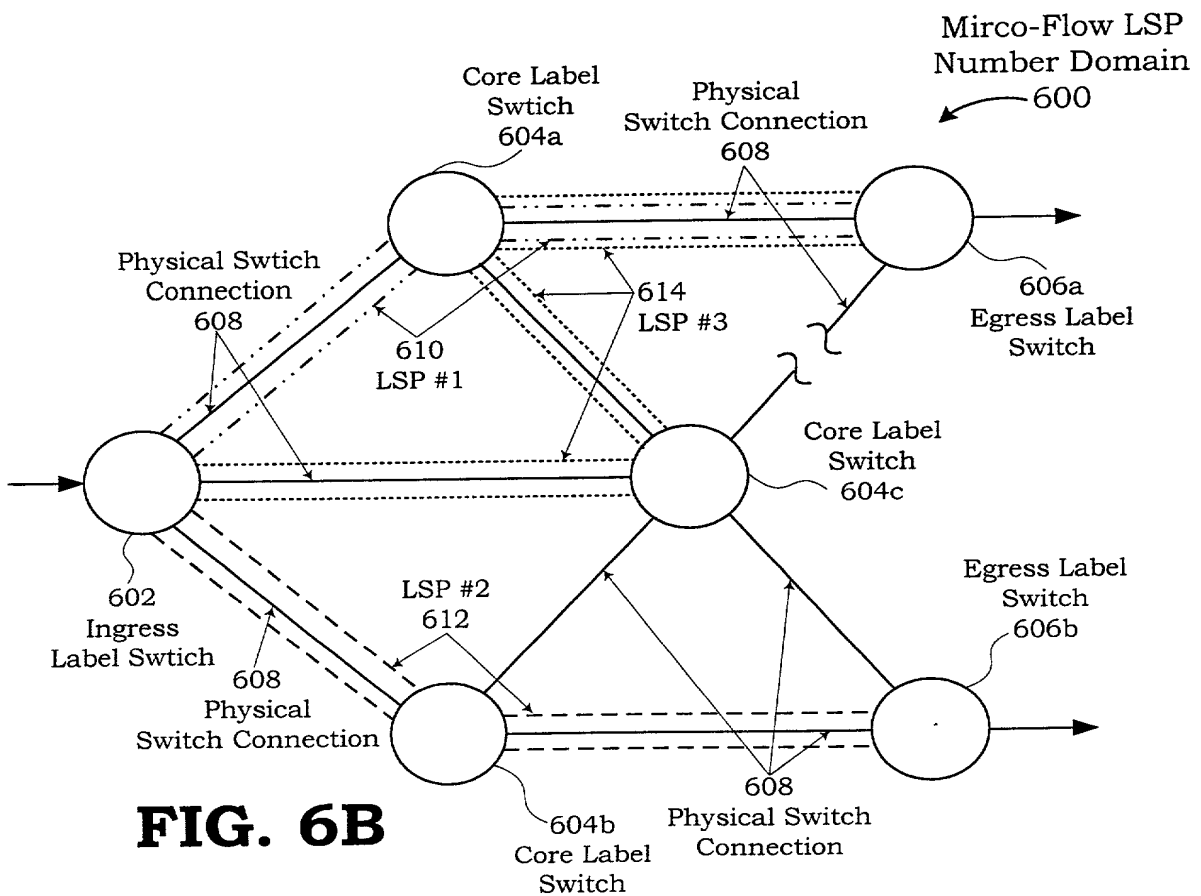


FIG. 6B

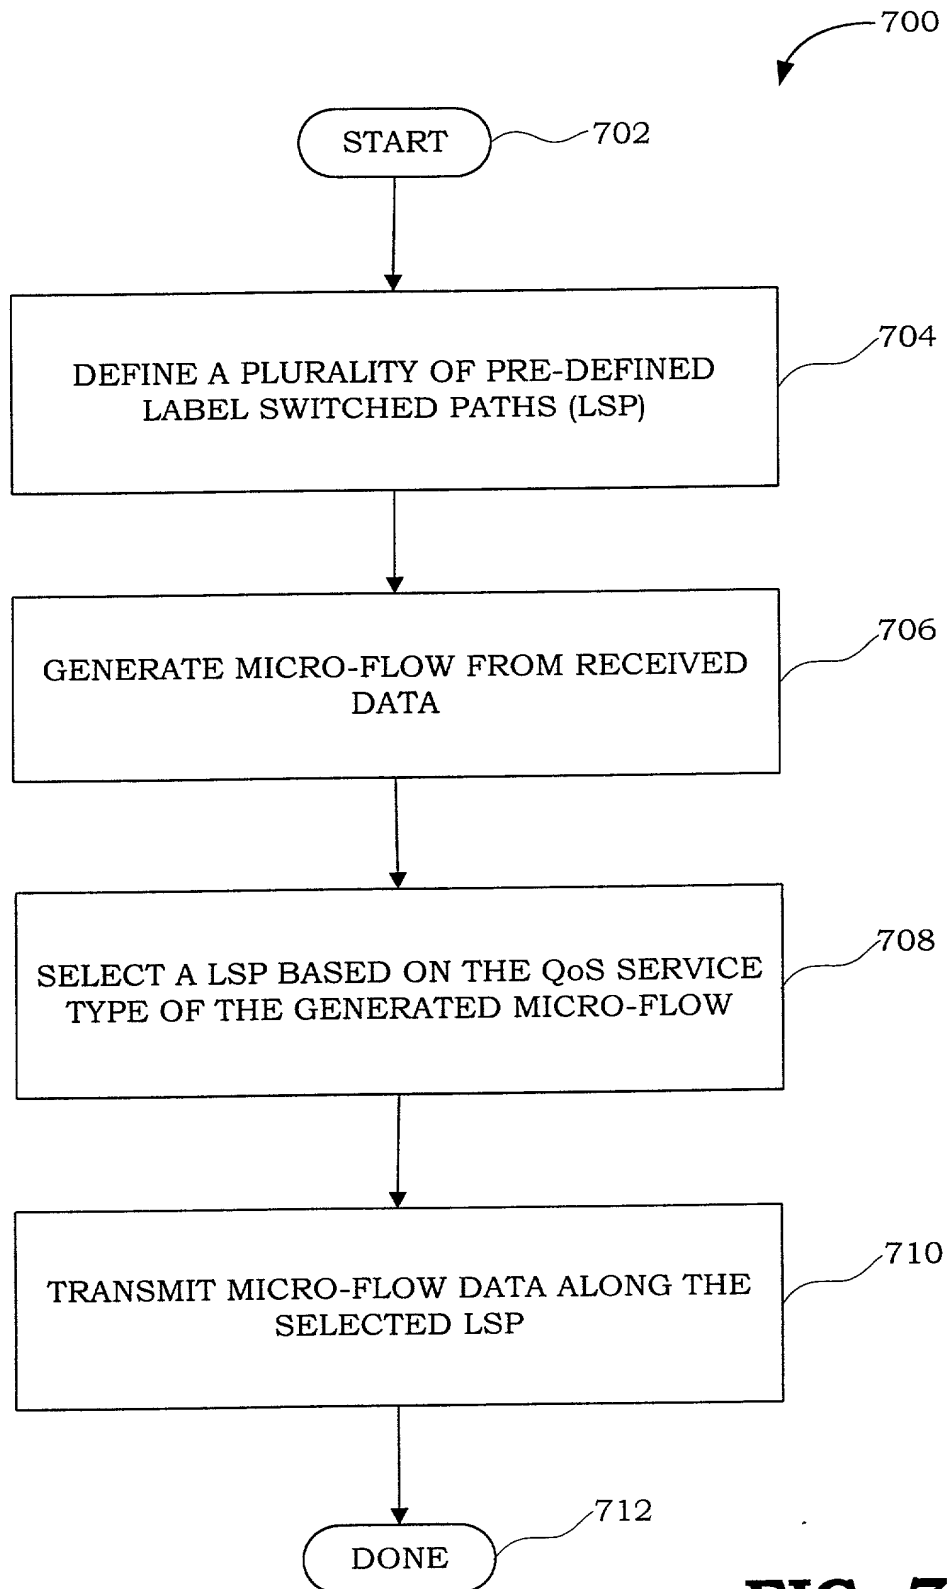


FIG. 7

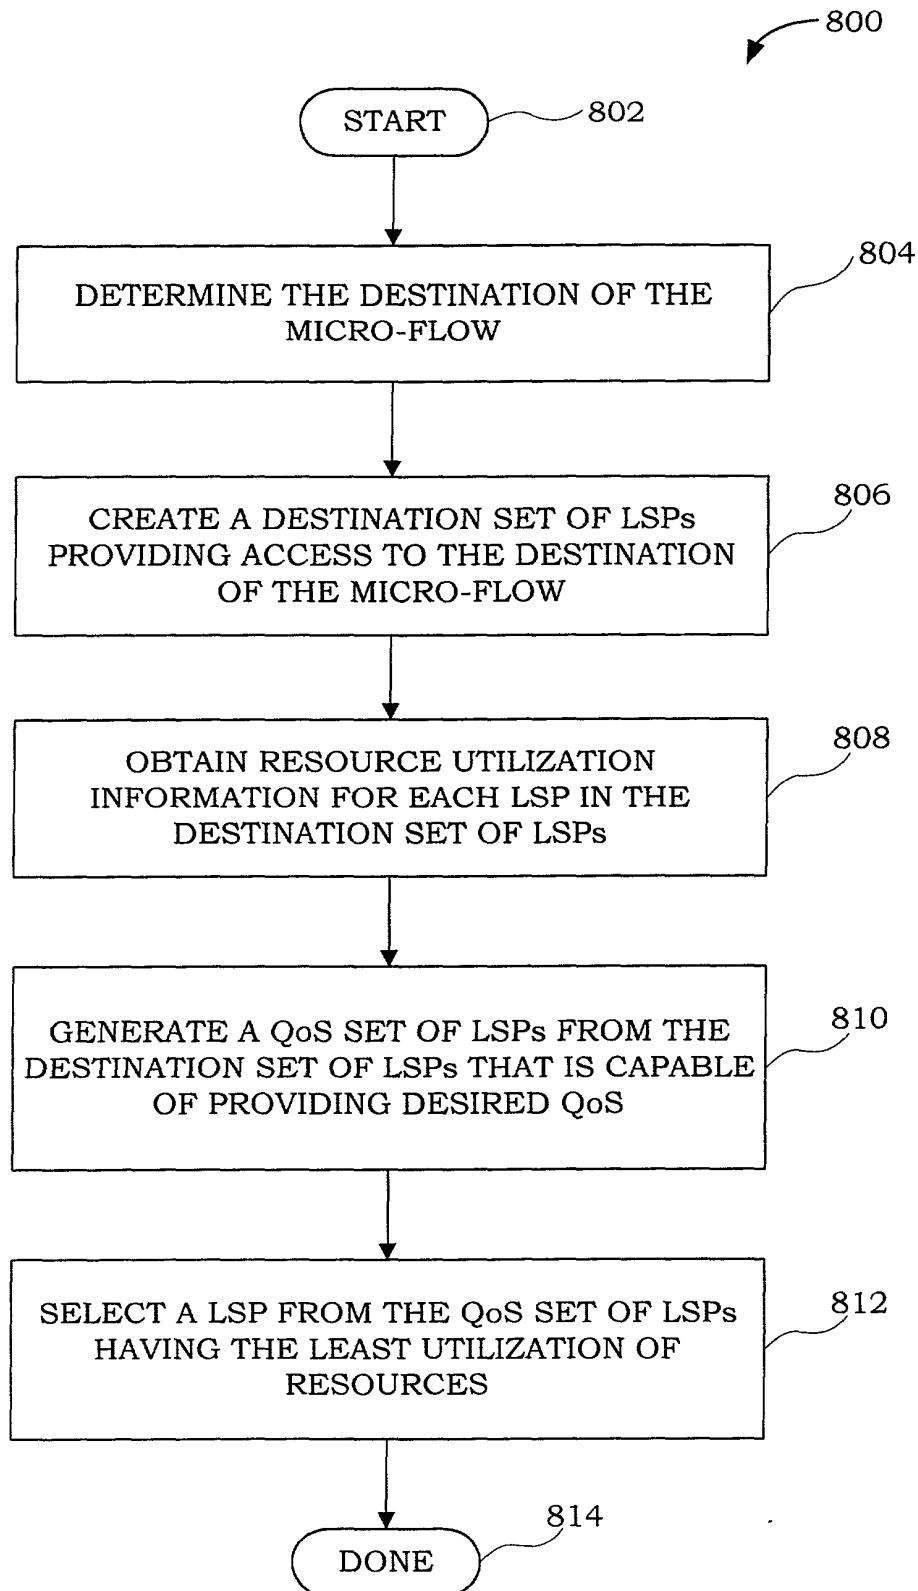


FIG. 8

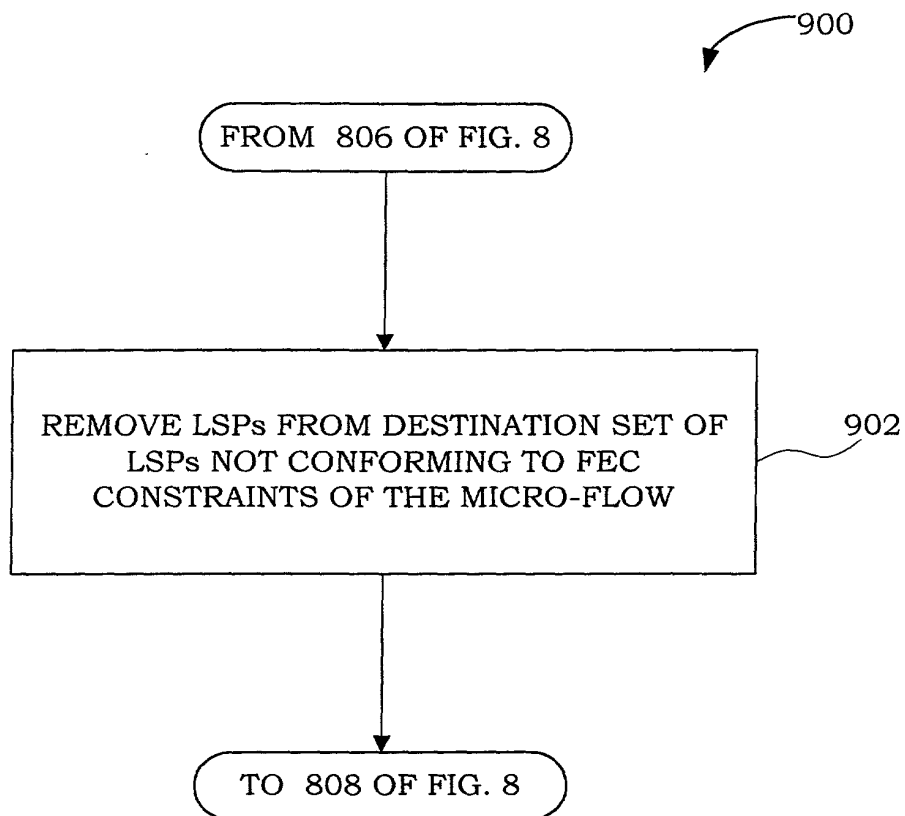


FIG. 9